


Smart Induction Heating Inverter Power Module w100k400



- 100kW MF-HF Inverter
- Frequency Range: 10 kHz - 400 kHz
- 100 kW in 16 litres
- Power Density: 6 kW/litre
- Efficiency: 99,1% @ 400 kHz
- Efficiency: 99,6% @ 20 kHz
- Weight: 16,5 kg

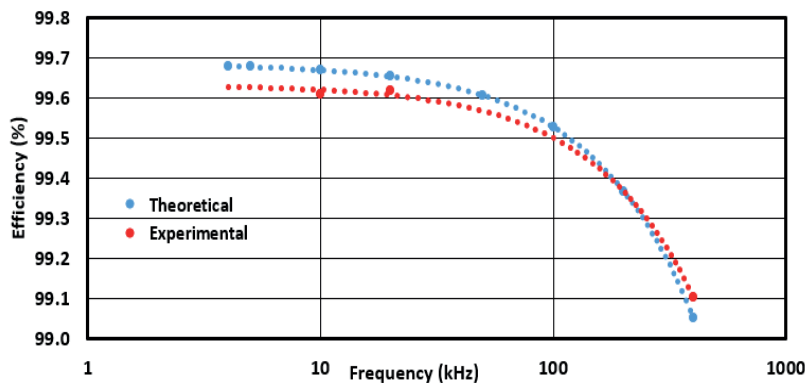

Universal Smart Power Module for Induction Heating Applications

Total Output Power 100 kW

Wide Frequency Range 10..400 kHz

SiC Single-Power Port Technology

Parallel Connection for Higher Powers

Extremely High Efficiency

Ultra Compact Size & Low Weight

Integrated Smart Controller

CAN Bus Interface to PLC

Integrates Power Inverter, Driving Circuits, Floating Auxiliary power Supplies, Sensors and Heatsink

Water Cooling

Applications

- Heat Treatment
- Induction Hardening
- Induction Tube Welding
- And more ...



GENERAL FEATURES	
Output Power	100 kW
Output Frequency Range	10...400 kHz
Single-Power Port	1 x 100 kW
Efficiency	99,6% @ 20 kHz / 99,1% @ 400 kHz
Power Density	6 kW/litre
Power Specific Weight	6,1 kW/kg
INPUT	
Supply Voltage Range	500-650 V _{DC}
Input DC Current	202 A _{DC} @ 500 V _{DC} , 155 A _{DC} @ 650 V _{DC}
Input DC Power	100,5 kW @ 20 kHz / 100,9 kW @ 400 kHz
OUTPUT	
Output Circuits	Series LC
Inductor Short Circuit Protection	Yes
CONTROLLER	
Controller	Fully Digital Controller
Control Strategies	FM
Power Regulation Range ⁽¹⁾	5...100%
Current Regulation Range ⁽¹⁾	5...100%
Power Setting Time ⁽²⁾	< 50 ms
MECHANICAL SPECIFICATIONS	
Size (width x depth x height)	311 x 402 x 132 mm
Weight	16,5 kg
COOLING SPECIFICATIONS	
Cooling	Water
Water Maximum Temperature	40°C
Minimum Water	5 l/min
ENVIRONMENTAL CONDITIONS	
Environmental Temperature Range	-10°C to +40°C
Maximum Humidity	90%
COMMUNICATION	
Interfaces	CAN BUS (basic) Interface

⁽¹⁾ At Nominal Load

⁽²⁾ At Adaptative Mode

SMART INDUCTION CONVERTER TECHNOLOGIES S.L.
 Parc Científic de la Universitat de València
 c/ Catedrático Agustín Escardino 9
 46980 Paterna, Valencia (SPAIN)
 Phone: +34 644 263 666



www.sictechinduction.com
sictech@sictechinduction.com